


Schindler PORT Destination Indicator
The display screen for elevator passengers



Schindler PORT Destination Indicator Specifications

Schindler PORT Destination Indicator is our graphical LCD indicator for elevators with an integrated loudspeaker that displays destination floors and announces the arrival floor. Available in both flush and surface mounting.

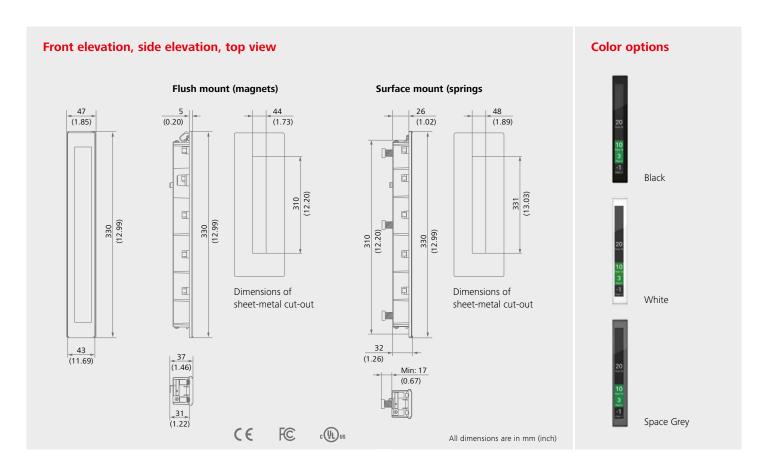

Properties and dimensions

	Flush mount (magnets): $47 \times 330 \times 48$ mm Surface mount (springs): $47 \times 330 \times 32$ mm	Mounting Height	964 mm (37.95 inch) to lower edge
Power Supply	24-48 VDC or PoE (IEEE 802.3af)	Screen	11" LCD TTF Display, 120×1280 pixel
Power Consumption	max. 5 W per unit	Range of Application	Temperature: 0 to 45 °C (14 to 113 °F) Humidity: 0 to 90 % non-condensing Indoor use only

Schindler Management Ltd. Zugerstrasse 13 6030 Ebikon Switzerland +41 41 445 30 60

www.schindler.com

This publication is for general informational purposes only and we reserve the right at any time to alter the product design and specifications. No statement contained in this publication shall be construed as a warranty or condition, expressed or implied, as to any product, its fitness for any particular purpose, merchantability, quality or shall be interpreted as a term or condition of any agreement regarding the products or services contained in this publication. Minor differences between printed and actual colors may exist