


Schindler PORT 4 Module The modular PORT solution for speed gates



Schindler PORT 4 Module Specifications

Integrate full PORT functionality into a range of speed gates and barriers with PORT 4 Module. Separate card reader and display screen modules provide architects and building owners the flexibility to design unique lobby access solutions. Tenants and guests experience smooth, convenient authentication and receive personalized elevator assignments to destination floors directly at the gate. Available with QR reader functionality for efficient and secure visitor management.

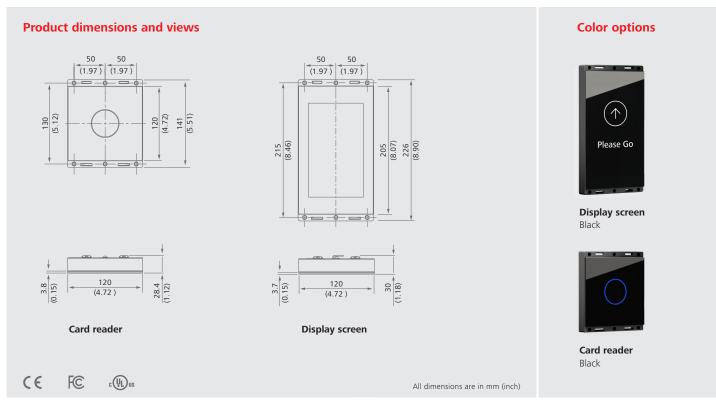

Properties and dimensions

Physical Dimensions (W×H×D)	120×226×30 mm (4.72×8.90×1.18 inch)	Card Reader	Supports all common RFID tags (all tags must be prequalified by our test service center prior to installation)
Power Supply	24-48 VDC or PoE (IEEE 802.3af)	Screen	7" display, 600x1024 pixel, touch panel
Power Consumption	9 W	Touchless Operation	myPORT
Standby Mode	Yes, triggered by proximity sensor	QR Code Camera	Optional (as PORT 4 Module QR)
Range of Application	Temperature: 0 to 45 °C (14 to 113 °F) Humidity: 0 to 90 % non-condensing Indoor use only	Audio and Video	Optional loudspeaker

Schindler Management Ltd. Zugerstrasse 13 6030 Ebikon Switzerland +41 41 445 30 60

www.schindler.com

We Elevate

we reserve the right at any time to alter the product design and specifications. No statement contained in this publication shall be construed as a warranty or condition, expressed or implied, as to any product, its fitness for any particular purpose, merchantability, quality or shall be interpreted as a term or condition of any agreement regarding the products or services contained in this publication. Minor differences between printed and actual colors may exist

This publication is for general informational purposes only and