

# SCHINDLER 9300® ADVANCED EDITION

**Type 10**  
**30°-K**

**Rise:** max. 6 m at a step width of 1000 mm


**Balustrade:** design E

**Balustrade height:** 900/1000 mm

**Inclination:** 30°



**Step width:** 600/800/1000 mm

**Step run:** 2 horizontal steps

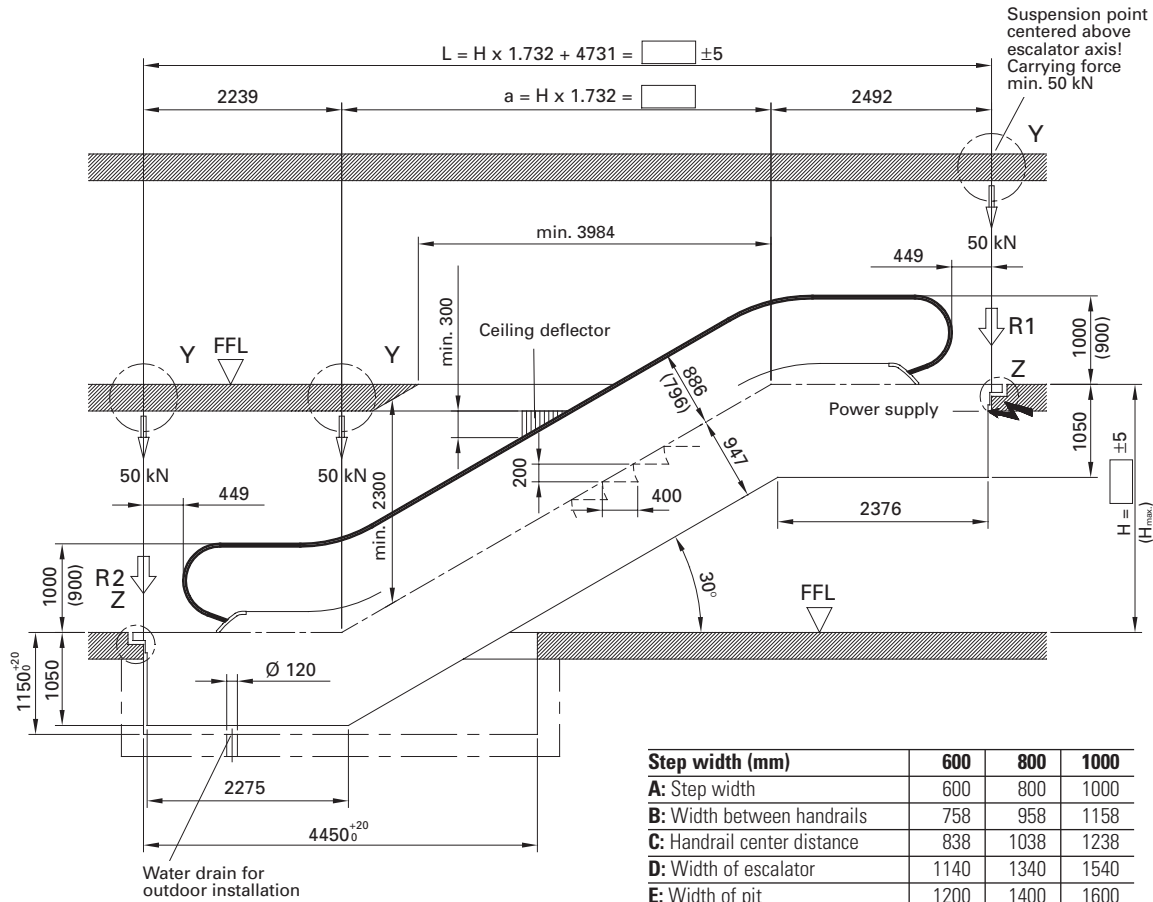


Step width (mm)	600	800	1000
<b>A:</b> Step width	600	800	1000
<b>B:</b> Width between handrails	758	958	1158
<b>C:</b> Handrail center distance	838	1038	1238
<b>D:</b> Width of escalator	1140	1340	1540
<b>E:</b> Width of pit	1200	1400	1600
<b>H<sub>max</sub>:</b> Maximum rise	6000	6000	6000

## Transportation dimensions

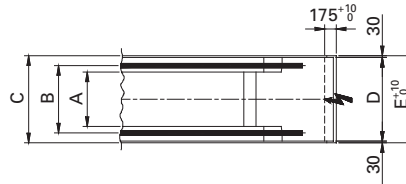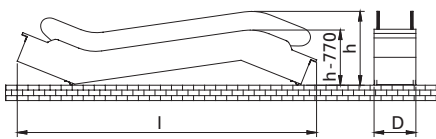

## Detail Z

Gaps at joints to be filled with joint filler (by customer)



Inlet for lighting and power circuits centered at upper end, through front face

Step width A mm	Rise H mm	Weight kN	Support loads		P mot kW	Transp. dimensions Balustrade height 1000	
			R1 kN	R2 kN		h	l
600	3000	57	47	39	4	2740	10860
	3500	60	50	42	4	2760	11850
	4000	63	53	45	4	2780	12840
	4500	67	56	48	4	2800	13840
	5000	70	59	51	4	2820	14830
	5500	73	62	54	5.5	2830	15830
800	6000	77	65	57	5.5	2840	16820
	3000	60	53	46	4	2740	10860
	3500	63	57	49	4	2760	11850
	4000	67	61	53	4	2780	12840
	4500	70	64	56	5.5	2800	13840
	5000	74	68	60	5.5	2820	14830
1000	5500	78	71	63	5.5	2830	15830
	6000	84	76	69	5.5	2840	16820
	3000	63	60	52	4	2740	10860
	3500	67	64	57	5.5	2760	11850
	4000	71	68	61	5.5	2780	12840
	4500	75	73	65	5.5	2800	13840
	5000	81	78	70	5.5	2820	14830
	5500	85	82	74	7.5	2830	15830
	6000	89	86	79	7.5	2840	16820

All dimensions in mm.  
Observe national regulations!  
Subject to changes.

**Schindler**

