


# SCHINDLER 9300® ADVANCED EDITION



**Type 10**  
**35°-K**

**Rise:** max. 6 m at a step width of 1000 mm  
**Balustrade:** design E  
**Balustrade height:** 900/1000 mm

**Inclination:** 35°  
**Step width:** 600/800/1000 mm  
**Step run:** 2 horizontal steps

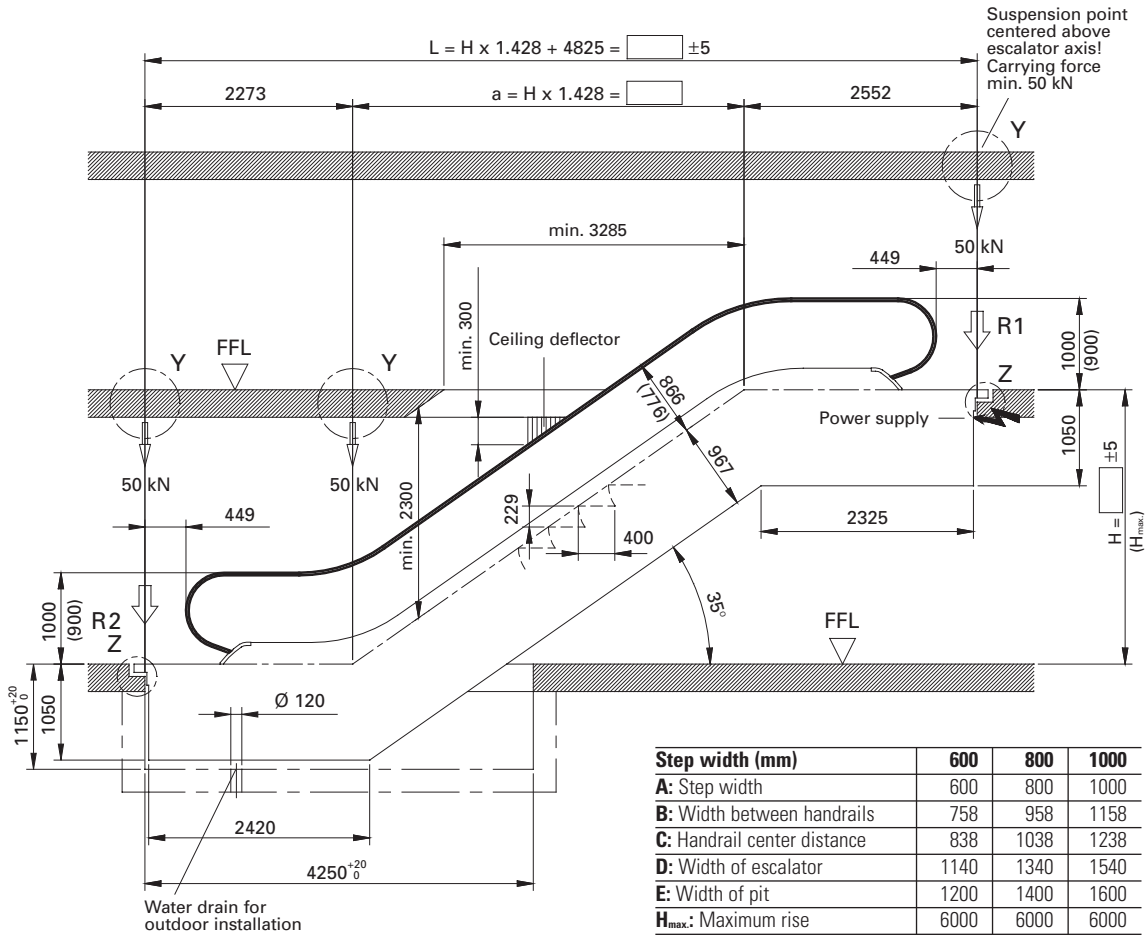


## Transportation dimensions

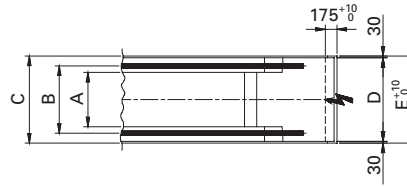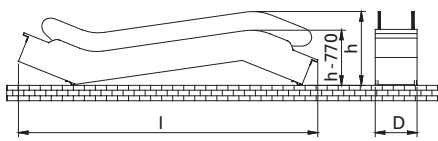

## Detail Z

Gaps at joints to be filled with joint filler (by customer)



Inlet for lighting and power circuits centered at upper end, through front face

Step width A mm	Rise H mm	Weight kN	Support loads		P mot kW v=0.5m/s	Transp. dimensions	
			R1 kN	R2 kN		Balustrade height 1000 h	l
600	3000	53	44	37	4	2820	10110
	3500	56	47	39	4	2850	10960
	4000	59	49	42	4	2880	11820
	4500	62	52	44	4	2900	12680
	5000	65	54	47	4	2910	13540
	5500	68	57	49	4	2930	14400
800	6000	71	59	52	5.5	2940	15270
	3000	56	50	42	4	2820	10110
	3500	59	53	45	4	2850	10960
	4000	62	56	48	4	2880	11820
	4500	66	59	51	4	2900	12680
	5000	69	62	54	5.5	2910	13540
1000	5500	72	65	57	5.5	2930	14400
	6000	75	68	60	5.5	2940	15270
	3000	59	56	49	4	2820	10110
	3500	63	60	52	4	2850	10960
	4000	66	63	55	5.5	2880	11820
	4500	69	67	59	5.5	2900	12680
	5000	73	70	62	5.5	2910	13540
	5500	76	74	66	5.5	2930	14400
	6000	83	79	71	7.5	2940	15270

All dimensions in mm.  
Observe national regulations!  
Subject to changes.

**Schindler**

